


**SUBMITTAL DRAWING: RINTERxx24PSLM**

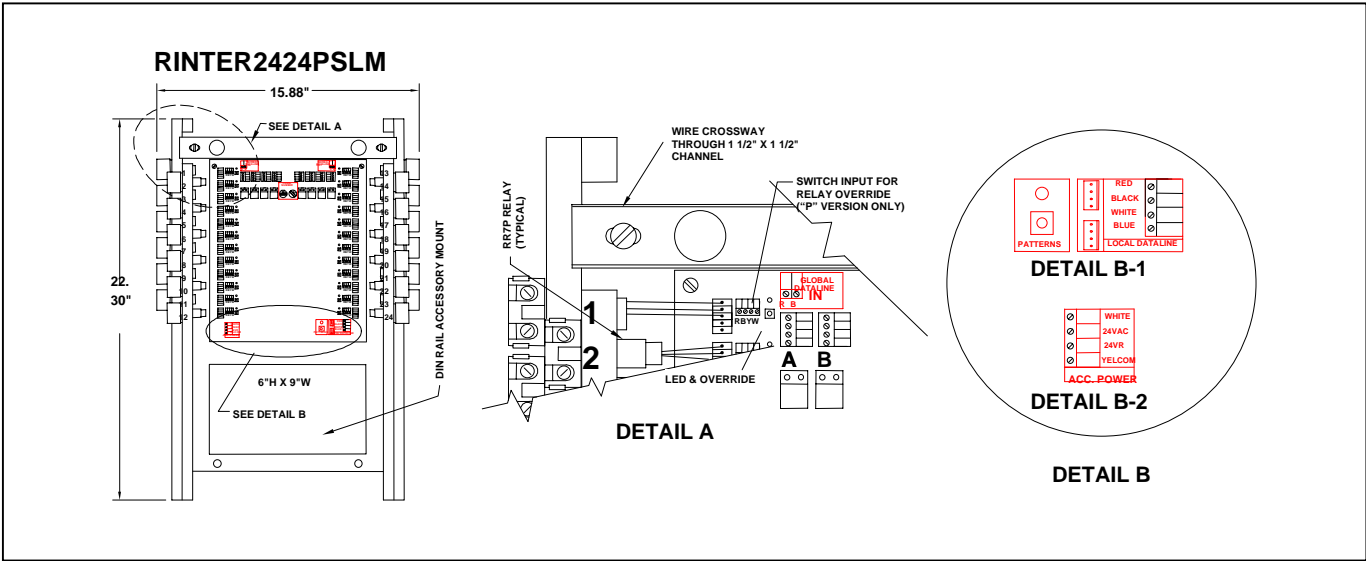

**RINTERxx24PSLM**

**DESCRIPTION**

The RINTERxx24PS(P) is the interior for a 24-relay PROSYS panel. The complete assembly consists of four modules:

1. Tub (RTUB24)
2. Interior (RINTERxx24PSLM)
3. Power Supply (RPWRxxx)
4. Cover (RCOV24xxx)

**Features:**

1. Pre-wired RR7P (3 wire) plug-in type relays.
2. Push-button override with LED status indication for each relay.
3. Eight programmable channels (A-H), each "softwired" to any group of relays in the panel.
4. Local channel push-button control with bi-color LED status indication (ON/OFF/Mixed group).
5. One maintained or momentary switch input per channel.
6. Sequential activation of relays in a softwired group.
7. Isolated, dry pilot contacts for each Channel.
8. EEPROM memory.
9. DIN rail mount for Softwired Clock or other accessory.

**Additional features of "P" version interiors:**

1. Relays are RR9P (5-wire pilot) plug-in version.
2. One maintained or momentary switch input per relay.

**SPECIFICATIONS**

**Description** Softwired Switching System  
Relay Panel Interior  
24-relay capacity

Catalog #s	# Installed	
	Relays	Wgt
RINTER0024PS	0	17 lbs
RINTER1224PS	12	20 lbs
RINTER2424PS	24	23 lbs
RINTER0024PSLM	0	17 lbs
RINTER1224PSLM	12	20 lbs
RINTER2424PSLM	24	23 lbs

**Operating Environment** 0-55 degrees C (32-131 F)  
0-95% RH, non-condensing,  
Non-corrosive atmosphere

**Power Supply** Optional, 115 or 277 VAC  
(See RPWRxxx)

**Mounting** Mounts in RTUB24xxx

**Codes** UL 916 Energy Management

**Finish** Painted Gray ASA 6-1

