


SUBMITTAL DRAWING: RINTERxx48PSLM

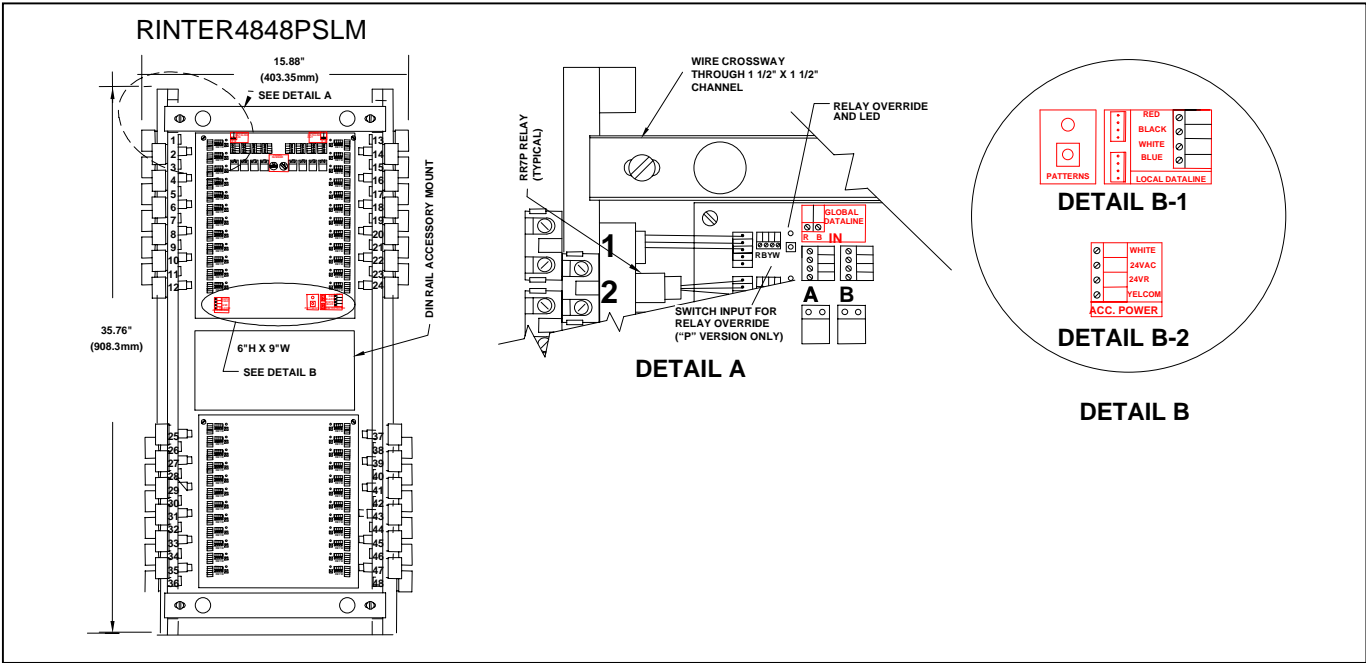

DESCRIPTION

The RINTERxx48PSLM is the interior for a 48-relay Softwired Switching System panel. The complete assembly consists of four modules:

1. Tub (RTUB48)
2. Interior (RINTERxx48PSM)
3. Power Supply (RPWRxxx)
4. Cover (RCOV48xxx)

Features:

1. Pre-wired RR7P (3-wire) plug-in type relays.
2. Push-button override with LED status indication for each relay.
3. Eight programmable channels (A-H), each "softwired" to any group of relays in the panel.
4. Local channel push-button control with bi-color LED status indication (ON/OFF/Mixed group).
5. One maintained or momentary switch input per channel.
6. Sequential activation of relays in a softwired group.
7. Isolated, dry pilot contacts for each Channel.
8. EEPROM memory.
9. DIN rail mount for Softwired Clock or other accessory.

Additional features of "P" version interiors:

1. Relays are RR9P (5-wire pilot) plug-in version.
2. One maintained or momentary switch input per relay.

SPECIFICATIONS

Description Softwired Switching System
Relay Panel Interior
48-relay capacity

Catalog #s

	# Installed	
	Relays	Wgt
RINTER0048PS	0	25 lbs
RINTER2448PS	24	32 lbs
RINTER3648PS	36	35 lbs
RINTER4848PS	48	39 lbs

Operating Environment

RINTER0048PSLM	0	25 lbs
RINTER2448PSLM	24	32 lbs
RINTER3648PSLM	36	35 lbs
RINTER4848PSLM	48	39 lbs

Power Supply

0-55 degrees C (32-131 F)
0-95% RH, non-condensing,
Non-corrosive atmosphere

Mounting

Optional, 115 or 277 VAC
(See RPWRxxx)

Codes

Mounts in RTUB48xxx

Finish

UL 916 Energy Management

Painted Gray ASA 6-1

Job Name: _____ Page ____ of ____

