


RR9PIN

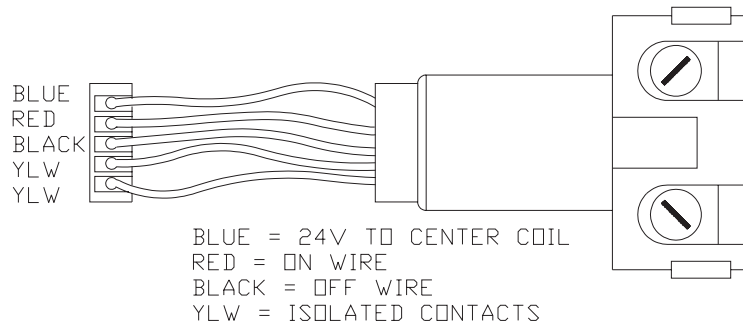

RR9PIN

DESCRIPTION

GE RR9PIN are factory installed and tested RR9P relays. These relays are mechanically latching-type devices for direct plug-in to a GE Lighting Automation Panel. Pilot contact provides status feedback through LED indicators mounted on RINTERxxxy. They require only momentary 24 volt rectified AC switch circuit pulses to open or close line voltage circuits. Coil design resists burnout that could occur if equipment or operational failure energized the relay for an extended period of time. All GE low voltage relays may be used to full rated capacity for tungsten filament, ballast or resistive loads.

SPECIFICATIONS

Description	Factory Installed and Tested Latching Relay with Plug in Connector, Pilot Contacts
Catalog #	RR9PIN
Operating Environment	0-60 Degrees C (32-140 F) 10-95% RH, Non Condensing Non corrosive atmosphere Non explosive atmosphere
Rated Capacity	
Lamp Load	20 amp Tungsten Filament 125VAC 20 amp Ballast 277/347 VAC
Resistive Load	20 amp 347 VAC
Motor Load	1/2 HP @ 110-125 VAC
Codes	UL Listed, CSA Certified

Job Name: _____

Page: ____ of ____