


**SUBMITTAL DRAWING: RINTERxx48PS(P)**

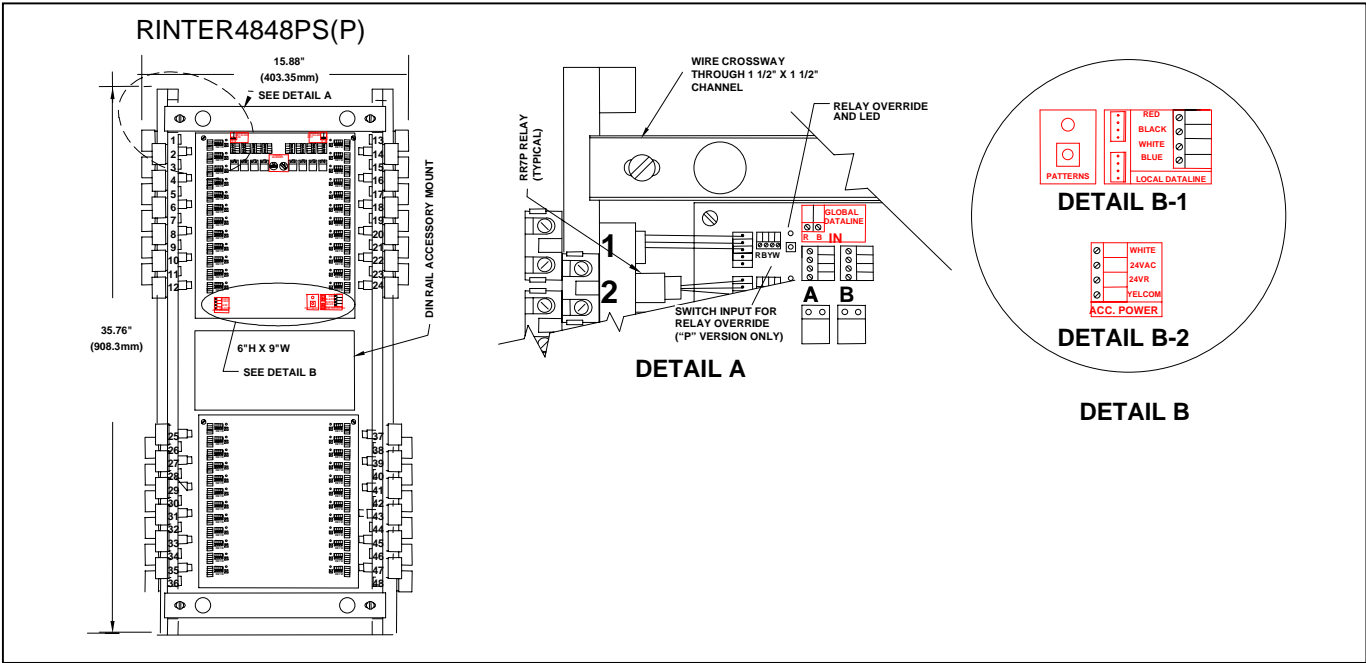

**DESCRIPTION**

The RINTERxx48PS(P) is the interior for a 48-relay Softwired Switching System panel. The complete assembly consists of four modules:

1. Tub (RTUB48)
2. Interior (RINTERxx48PS(P))
3. Power Supply (RPWRxxx)
4. Cover (RCOV48xxx)

**Features:**

1. Pre-wired RR7P (3-wire) plug-in type relays.
2. Push-button override with LED status indication for each relay.
3. Eight programmable channels (A-H), each "softwired" to any group of relays in the panel.
4. Local channel push-button control with bi-color LED status indication (ON/OFF/Mixed group).
5. One maintained or momentary switch input per channel.
6. Sequential activation of relays in a softwired group.
7. Isolated, dry pilot contacts for each Channel.
8. EEPROM memory.
9. DIN rail mount for Softwired Clock or other accessory.

**Additional features of "P" version interiors:**

1. Relays are RR9P (5-wire pilot) plug-in version.
2. One maintained or momentary switch input per relay.

**SPECIFICATIONS**

**Description** Softwired Switching System  
Relay Panel Interior  
48-relay capacity

**Catalog #s**

	<b># Installed</b>	
	<b>Relays</b>	<b>Wgt</b>
RINTER0048PS	0	25 lbs
RINTER2448PS	24	32 lbs
RINTER3648PS	36	35 lbs
RINTER4848PS	48	39 lbs
RINTER0048PSP	0	25 lbs
RINTER2448PSP	24	32 lbs
RINTER3648PSP	36	35 lbs
RINTER4848PSP	48	39 lbs

**Operating Environment**

0-55 degrees C (32-131 F)  
0-95% RH, non-condensing,  
Non-corrosive atmosphere

**Power Supply**

Optional, 115 or 277 VAC  
(See RPWRxxx)

**Mounting**

Mounts in RTUB48xxx

**Codes**

UL 916 Energy Management

**Finish**

Painted Gray ASA 6-1

Job Name: \_\_\_\_\_ Page \_\_\_\_ of \_\_\_\_

